


AKUSTIK[®] - BORDER

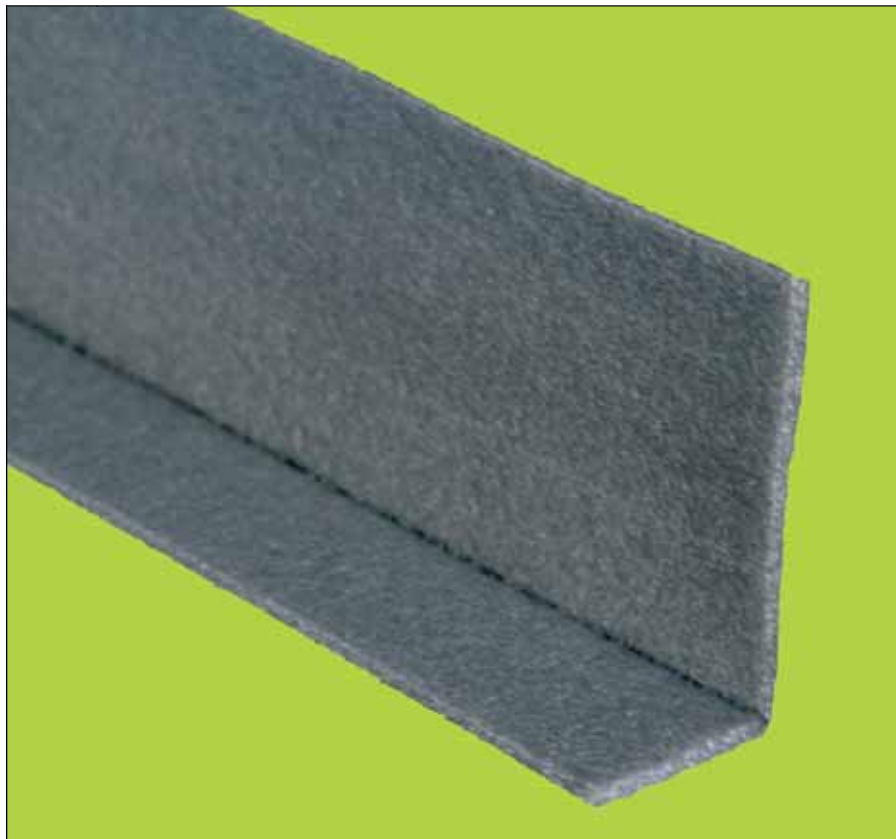

AKUSTIK-BORDER IS THE
'L-SHAPED' BAND TO BE
EASILY INSTALLED ON
THE PERIMETRICAL
WALLS

MATERIAL

Akustik[®]-Border is made of expanded polyethylene, density 30 kg/m². It can be easily installed between the perimeter walls and the floor. Its "L" shape makes it indispensable to carry out a perfect footfall sound insulation.

INSTALLATION

Akustik[®]-Border has a self-adhesive side and it is very easy to be installed. It can be used together with every floor sound insulation product, especially with Ecoroll, Pavit-One and Akustik[®] PE. This material must be placed between the wall and the floor and cut after the flooring.

PACKAGING

Cartons of 400
linear metres

STANDARD DIMENSIONS

Thickness: 6 mm
L's dimensions:
100 + 50 mm
Width: 2000 mm.
Density: 30 kg/m³

