


AKUSTIK[®] - BAND

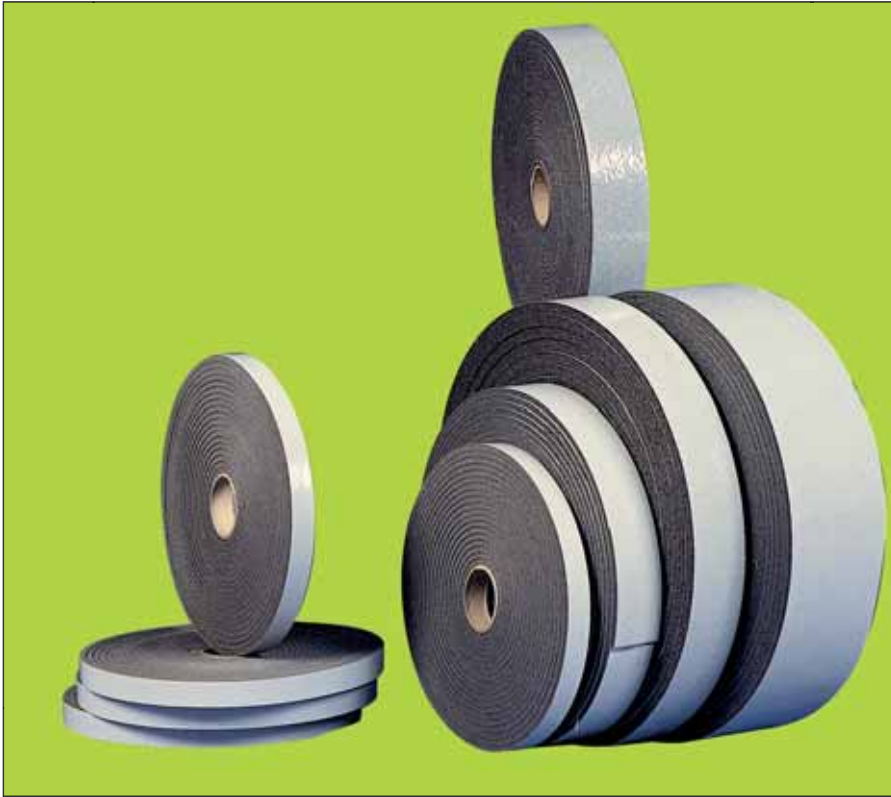

INSULATING TAPED MADE
OF EXPANDED CROSS-LINKED
POLYETHYLENE WITH
CLOSED-CELL STRUCTURE.

PHYSICAL PROPERTIES

• Adhesive	Acrylic water-based
• Colour	Grey anthracite
• Reaction to fire	Self-extinguishing, CL 1 on request
• Thermal conductivity	$\lambda = 0.0329 \text{ N Cal}$
• Density	33 Kg/m^3
• Format	Rolls 25 m.
• Resistance to temperature	$- 80^\circ \text{ C} + 100^\circ \text{ C}$
• Thickness	from 3 mm on



MATERIAL

Akustik[®]-Band is the gasket resistant to noises, air, water and dust. This product made of expanded reticulated polyethylene with closed cells, density 33 Kg/m^3 , can be supplied single/double-sided self-adhesive.

STANDARD FORMATS

Thickness: 3, 6, etc. mm
Width:
15, 20, 30, 40, 50, 70, 90
etc. mm
Length:
20 m. (3 mm thick)
20 m. (5 mm thick)
15 m. (10 mm thick)

REACTION TO FIRE

Self-extinguishing, CL 1 on request.

FIELDS OF APPLICATION

Akustik[®]-Band is widely used as gaskets for metal structures for plasterboards and moveable walls, as well as for channellings, ventilation plant and plant engineering.

INSTALLATION

Akustik[®]-Band is easy to install thanks to its self-adhesive side and it can be applied to any surface provided that it is smooth and free of oil, dust and grease. Also available double-sided self-adhesive.